

OPzV bloc solar.power

Sealed lead-acid battery for cyclic applications



Motive Power Systems

Reserve Power Systems

Special Power Systems

Service

Your benefits with HOPPECKE OPzV bloc solar.power

- **Maintenance-free regarding water refilling** - due to innovative Gel-technology
- **Very high cycle stability during PSoC¹ operation** - due to tubular plate design with efficiently charge current acceptance
- **Maximum compatibility** - dimensions according to DIN 40744
- **Easy assembly and installation** - battery lid with integral handle
- **Higher short-circuit safety even during the installation** - based on HOPPECKE system connectors



Typical applications of HOPPECKE OPzV bloc solar.power

- **Solar/Off-grid and Leisure Applications**
Isolated holiday homes,
cottages, alpine huts
- **Storage for direct consumption
of photovoltaic (PV) energy**
- **Traffic systems**
Signalling systems, lighting
- **Telecommunications**
Mobile phone stations,
BTS-stations,
off-grid/on-grid solutions




HOPPECKE

POWER FROM INNOVATION

Type overview


Capacities, dimensions and weights

Type	C ₁₀₀ /1.85 V Ah	C ₅₀ /1.85 V Ah	C ₂₄ /1.83 V Ah	C ₁₀ /1.80 V Ah	C ₅ /1.77 V Ah	Max. Weight kg	max.* Length L mm	max.* Width W mm	max.* Height H mm	Fig.
12V 1 OPzV bloc solar.power 70	70.0	55.0	55.2	48.0	42.5	38.0	272	205	383	A
12V 2 OPzV bloc solar.power 120	120.0	120.0	110.4	96.0	84.0	52.0	272	205	383	A
12V 3 OPzV bloc solar.power 180	180.0	175.0	165.6	144.0	126.5	74.0	380	205	383	A
6V 4 OPzV bloc solar.power 250	250.0	235.0	220.8	192.0	168.5	51.0	272	205	383	B
6V 5 OPzV bloc solar.power 300	300.0	295.0	276.0	240.0	210.5	66.0	380	205	383	B
6V 6 OPzV bloc solar.power 370	370.0	350.0	333.6	289.0	252.5	73.0	380	205	383	B

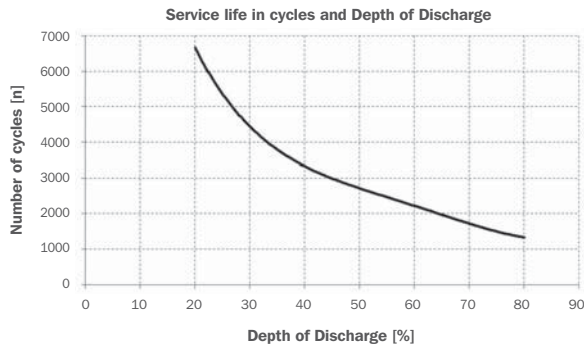


C₁₀₀, C₅₀, C₂₄, C₁₀ and C₅ = Capacity at 100 h, 50 h, 24 h, 10 h and 5 h discharge

* according to DIN 40744 datas to be understood as maximum values

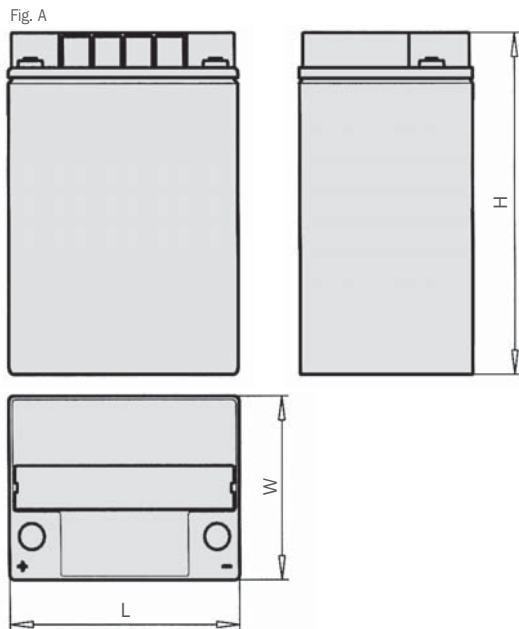

12 V 1 OPzV bloc solar.power 70 - 12 V 3 OPzV bloc solar.power 180

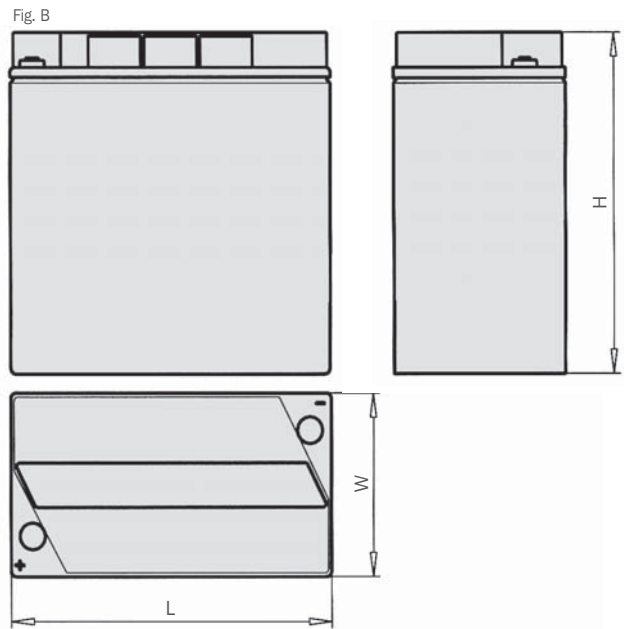

6 V 4 OPzV bloc solar.power 250 - 6 V 6 OPzV bloc solar.power 370

Optimal environmental compatibility - closed loop for recovery of materials in an accredited recycling system.

IEC 60896-21
IEC 61427

‡ Partial State of Charge